

EHAO INDUSTRIAL VALVE

EHAO PLASTIC FITTINGS



- PP压缩管件模具
PP Compression fittings mould
- PVC、PP扩口管件模具
PVC、PP Collapsible pipe fittings mould
- PP-R给水管件模具
PP-R Water Supplying pipe fittings mould
- PE电熔、热熔管件模具
PE Electric melting, heat melting pipe fittings mould
- ABS、PVC给排水管件模具
ABS、PVC Supply or drain water pipe fittings mould
- 各种塑料的球阀模具
Plastic ball valve mould

Corner of factory



模具制造设备

Manufacturing equipment for mould



制造车间

Manufacturing workshop



模具制造设备

Manufacturing equipment for mould



模具制造设备

Manufacturing equipment for mould



制造车间

Manufacturing workshop



模具制造设备

Manufacturing equipment for mould

SHAOKING EHAO IMPORT AND EXPORT CO.,LTD.
ZHEJIANG YIHAO PLASTICS CO.,LTD.

Address: WangDianFan Industry,Ruanshi town,Zhuji,ZheJiang,311835
Mobile: +86 15888169375
Tel: 0575-86570246
Q Q: 2482718478
Http://www.ehaomould.com Http://www.ehaogroup.com
E-mail: kevin@ehaogroup.com



企业官网



模具官网



阿里官网



PROFESSIONAL FITTINGS/AUTO PARTS MOULD
AND UPVC BALL VALVE MANUFACTURE



ISO9001-2000

[Http://www.ehaogroup.com](http://www.ehaogroup.com)

[Http://www.ehaomould.com](http://www.ehaomould.com)

[Http://www.ehaoplastic.com](http://www.ehaoplastic.com)

Mould & Valve Manufacture Catalogue



PROFESSIONAL MOULD AND PRODUCTS MANUFACTURE

Auto parts moulds



PROFESSIONAL MOULD AND PRODUCTS MANUFACTURE

Pipe fittings mould





EHAO

Smart home mould


PROFESSIONAL MOULD AND PRODUCTS MANUFACTURE



EHAO

Upvc ball valves


PROFESSIONAL MOULD AND PRODUCTS MANUFACTURE

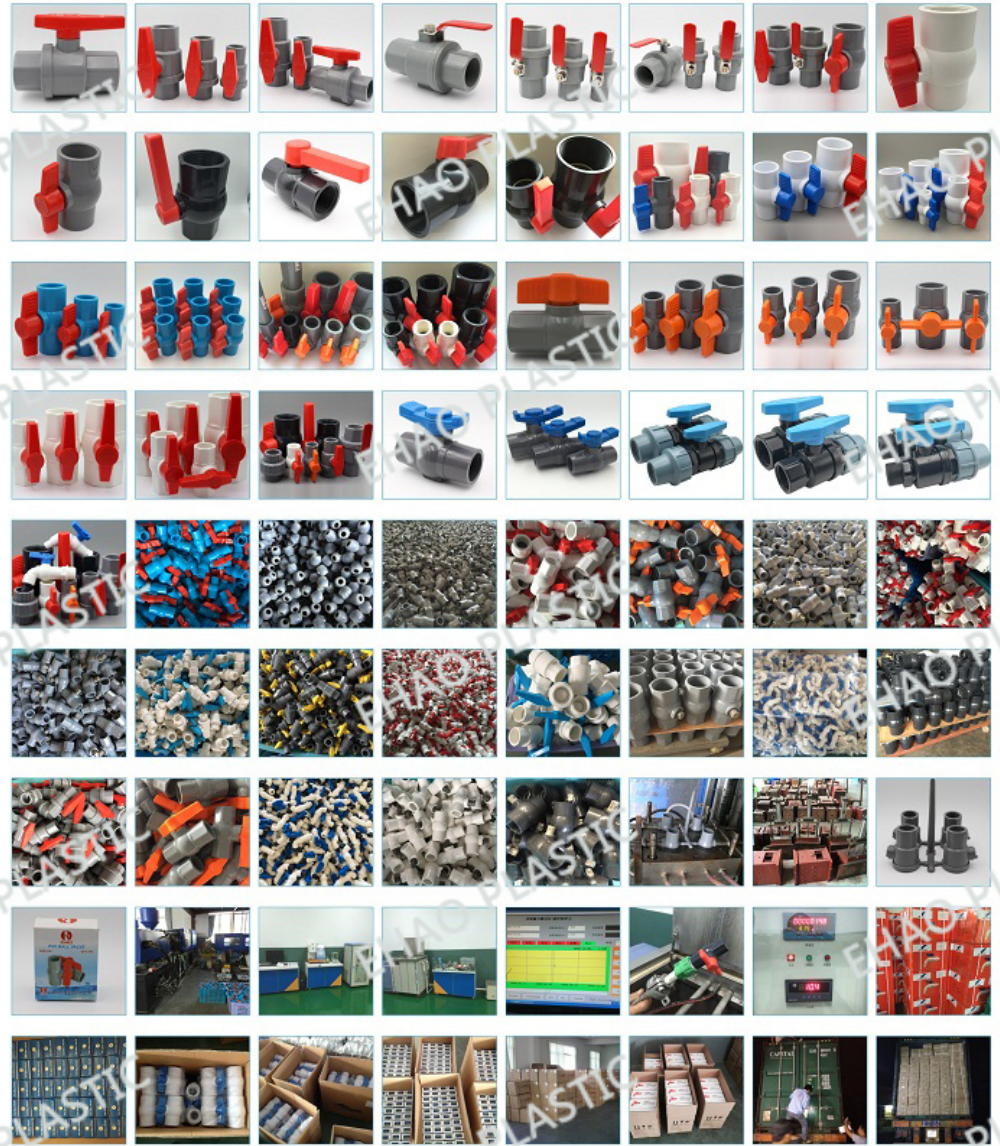




PROFESSIONAL MOULD AND PRODUCTS MANUFACTURE

PVC compact ball valve



End: Threaded Or Socket
 Working Pressure: 150 PSI / 1.0 Mpa
 Standard: DIN / BS / ANSI / JIS
 Size: 1/2" - 4"

NO.	NAME OF PART	MATERIALS
1	LOGO CAP	PP
2	HANDLE	PP
3	ORING	NBR
4	STEM+BALL	PP
5	SEAT SEAL	TPE
6	BODY	UPVC



Nominal Size	BS	ANSI	JIS	DIN	NPT	BSPT	A	B	C	E	F	Weight	Quantity
D3	d2	d2	d2	d2	Thd./in	Thd./in	mm	mm	mm	mm	mm	g	Pcs/Ctn
20mm(1/2")	22	21.34	22	20	14	14	20	14	65	72	45	64	320
25mm(3/4")	26	26.67	26	25	14	14	35	75	83	52	70	95	200
32mm(1")	34	33.4	32	32	11.5	11	44	90	100	61	85	162	120
40mm(1-1/4")	42	42.16	38	40	11.5	11	54	94	104	71	97	258	84
50mm(1-1/2")	48	48.26	44	50	11.5	11	58.5	104	119	74	108	351	60
63mm(2")	60	60.33	60	63	11.5	11	70	115	133	96	127	570	36
75mm(2-1/2")	76	75	76	75	8	11	88	183	172	105	148	1035	20
90mm(3")	89	88.9	89	90	8	11	106	205	210	130	170	1650	10
110mm(4")	114	114.3	114	110	8	11	130	220	255	135	210	2950	6




PROFESSIONAL MOULD AND PRODUCTS MANUFACTURE

PVC two pcs ball valve



End: Socket
 Working Pressure: 150 PSI / 1.0 Mpa
 Standard: DIN / BS / ANSI / JIS
 Size: 1/2" - 1"

NO.	NAME OF PART	MATERIALS
1	NUT	SS304
2	HANDLE	SS304
3	ORING	NBR
4	STEM	BRASS
5	BALL	ABS PLATED
6	SEAT SEAL	TPE
7	CONNECTOR	UPVC
8	BODY	UPVC




Nominal Size	BS	ANSI	JIS	DIN	N	L	H	d	D	W	W1	W2	Quantity
mm/Inch	D1	D2	D2	D2	NPT	BSPT	mm	mm	mm	mm	mm	mm	Pcs/Ctn
20mm(1/2")	21.40	21.48	22.16	20.48	18	19	84.9	60	14.9	32.7	50	122	240
25mm(3/4")	27.04	27.04	26.36	25.04	14	14	103.1	72	19.9	37.7	83	158	160
32mm(1")	34.14	34.14	32.12	32.14	14	14	113.8	79	24.9	47.3	83	221	96

PVC octagonal ball valve




End: Threaded Or Socket
 Working Pressure: 150 PSI / 1.0 Mpa
 Standard: DIN / BS / ANSI / JIS
 Size: 1/2" - 4"

NO.	NAME OF PART	MATERIALS
1	LOGO CAP	PP
2	HANDLE	PP
3	ORING	NBR
4	STEM+BALL	PP
5	SEAT SEAL	TPE
6	BODY	UPVC




Nominal Size	BS	ANSI	JIS	DIN	NPT	BSPT	A	B	C	E	F	Weight	Quantity
D3	G	G	F1	G	Thd./in	Thd./in	mm	mm	mm	mm	mm	g	Pcs/Ctn
20mm(1/2")	22	21.34	22	20	14	14	20	14	65	14	77	68	320
25mm(3/4")	26	26.67	26	25	14	14	21	16	73	16.8	84	99	200
32mm(1")	34	33.4	32	32	11.5	11	24	23	87	18.8	98	172	120
40mm(1-1/4")	42	42.16	38	40	11.5	11	24	25	100	21.8	111	270	84
50mm(1-1/2")	48	48.26	48	50	11.5	11	26	29	107	19.7	122	398	60
63mm(2")	60	60.33	60	63	11.5	11	21	20	127	26.3	139	612	36
75mm(2-1/2")	76	75	76	75	8	11	18.2	29.5	180	33.8	176.9	1050	20
90mm(3")	89	88.9	89	90	8	11	19	29.3	200	40.6	212.9	1680	10
110mm(4")	114	114.3	114	110	8	11	26	35.4	210	48.2	245.6	3100	6

PVC two pcs ball valve



End: Threaded Or Socket
 Working Pressure: 150 PSI / 1.0 Mpa
 Standard: DIN / BS / ANSI / JIS
 Size: 1/2" - 2"

NO.	NAME OF PART	MATERIALS
1	HANDLE	UPVC/ABS
2	STEM	UPVC
3	ORING	NBR
4	BALL	UPVC/ABS
5	SEAT SEAL	TPE
6	CONNECTOR	UPVC
7	BODY	UPVC




Nominal Size	BS	ANSI	JIS	DIN	NPT	BSPT	A	B	C	E	F	Weight	Quantity
mm/Inch	D	D	D	D	Thd./in	Thd./in	mm	mm	mm	mm	mm	g	Pcs/Ctn
20mm(1/2")	22	21.34	22	20	14	14	70	15.1	20.5	63	94	240	
25mm(3/4")	26	26.67	26	25	14	14	78	17.8	24	75	139	160	
32mm(1")	34	33.4	32	32	11.5	11	92	20.9	25	88	215	96	
40mm(1-1/4")	42	42.16	38	40	11.5	11	105	21	26	97	330	72	
50mm(1-1/2")	48	48.26	48	50	11.5	11	114	22.9	31	111.5	510	48	
63mm(2")	60	60.33	60	63	11.5	11	175	23.2	38	136	710	30	



PROFESSIONAL MOULD AND PRODUCTS MANUFACTURE


True union PVC ball valve compression

EH13

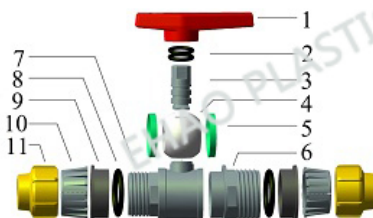

End: Socket
Working Pressure: 150 PSI / 1.0 Mpa
Standard: DIN / JIS
Size: 1" - 2"

NO.	NAME OF PART	MATERIALS
1	HANDLE	UPVC
2	ORING	NBR
3	STEM	UPVC
4	BALL	UPVC/ABS
5	SEAT SEAL	TPE
6	CONNECTOR	UPVC
7	BODY	UPVC
8	ORING	NBR
9	FASTERN	PP
10	LOCKER	POM
11	CAP	PP



Nominal Size mm/Inch	JIS C	DIN C	A mm	B mm	F mm	G mm	Quantity Pcs/Ctn
32mm(1")	32	32	95	14	95	197	100
40mm(1-1/4")	38	40	110	16	109	225	50
50mm(1-1/2")	48	50	128	18	124	243	38
63mm(2")	60	63	143	20	149	265	26



PROFESSIONAL MOULD AND PRODUCTS MANUFACTURE


True union PVC ball valve Male threaded + compression

EH15



End: Male Thread
Working Pressure: 150 PSI / 1.0 Mpa
Standard: DIN / JIS
Size: 1" - 2"


NO.	NAME OF PART	MATERIALS
1	HANDLE	UPVC
2	ORING	NBR
3	STEM	UPVC
4	BALL	UPVC/ABS
5	SEAT SEAL	TPE
6	BODY	UPVC
7	CONNECTOR	UPVC
8	ORING	NBR
9	FASTERN	PP
10	LOCKER	POM
11	CAP	PP



Nominal Size mm/Inch	JIS C	DIN C	A mm	B mm	D mm	E mm	F mm	G mm	Quantity Pcs/Ctn
32mm(1")	32	32	95	14	22	32.5	95	155	120
40mm(1-1/4")	38	40	110	16	30	41.8	109	172	70
50mm(1-1/2")	48	50	128	18	38	47	124	187	40
63mm(2")	60	63	143	20	49	58.8	149	222	30


True union PVC ball valve Female threaded + compression

EH14

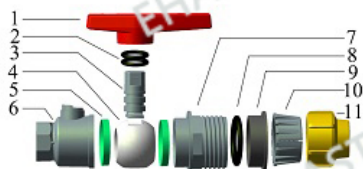

End: Female Thread
Working Pressure: 150 PSI / 1.0 Mpa
Standard: DIN / JIS
Size: 1" - 2"

NO.	NAME OF PART	MATERIALS
1	HANDLE	UPVC
2	ORING	NBR
3	STEM	UPVC
4	BALL	UPVC/ABS
5	SEAT SEAL	TPE
6	BODY	UPVC
7	CONNECTOR	UPVC
8	ORING	NBR
9	FASTERN	PP
10	LOCKER	POM
11	CAP	PP



Nominal Size mm/Inch	JIS C	DIN C	A mm	B mm	D mm	F mm	G mm	Quantity Pcs/Ctn
32mm(1")	32	32	95	14	31	95	151	100
40mm(1-1/4")	38	40	110	16	38.7	109	164	70
50mm(1-1/2")	48	50	128	18	45.4	124	178	40
63mm(2")	60	63	143	20	53	149	212	27

Bibcocks / taps





PROFESSIONAL MOULD AND PRODUCTS MANUFACTURE

PP compression fittings.



PROFESSIONAL MOULD AND PRODUCTS MANUFACTURE

PPR fittings and valves.

